


Pointer 12v recessed steplights

Pointer 12v recessed steplights are designed to screw-fix in stone or brick walls and timber surfaces for use with 12v 10-35w MR16 halogen lamps or low energy l.e.d. modules. "Eyelid" models conceal the light source from overhead view. The front bezel removes for screwing the cast brass body into a timber or wall and for easy lamp changing without removing the light from the wall. **Pointer** steplights are fitted with a clear lens as standard: **E2500F** flush frosted lens, which is recommended for use with plain rim models, and clip-on glare louvres & spread lens are optional. **Pointer** steplights are rated IP66 - suitable for splash locations such as the side of water staircases. They are fitted with a 6m rubber cable for easy connection to a transformer without cable joints in many cases. The fine sandblasted finish of brass models will weather to an ochre colour to blend with sandstone, timber and buff brick. Copper rims will weather from their original bright finish to a mottled brown finish within weeks to blend well with red brick walls, while 316 stainless steel rims are designed to resist corrosion in most situations.

12v 35w LED IP66



E2526 - with eyelid after weathering

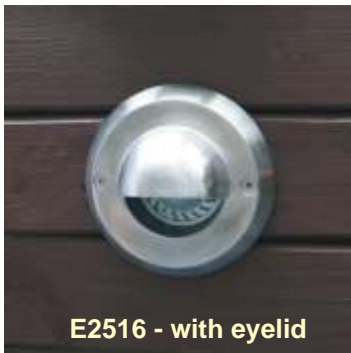

E2516 - with eyelid



E2515 - with plain rim



E2525 - with plain rim



E2565 - with plain rim



E2566 - with eyelid after weathering

E2515	Pointer steplight - Stainless steel rim
E2516	Pointer eyelid steplight - Stainless steel eyelid
E2525	Pointer steplight - Copper Rim
E2526	Pointer eyelid steplight - Copper Eyelid
E2565	Pointer steplight - Brass
E2566	Pointer eyelid steplight - Brass

Mariner Lamp Energy Ratings

A	12v L.E.D.,MODULES
B	HALOGEN POWERSAVERS
C	12v HALOGEN LAMPS

Halogen lamp / l.e.d. module comparison			
Powersaver	Standard	l.e.d. module equivalent	
-	20w 36°	MR16LED3WW	3w warm white
-	35w 36°	MR16LED6WW	6w warm white
35w 36°	-	MR16LED6W	6w white

