


RGBCCTF30 - RGB + CCT LED Floodlight 30w 240V

Description

RGB + CCT LED Floodlight 30w 240V with its compact size and slim-line design makes it a neat unobtrusive fitting for wall washing and floodlighting trees from 3m to 6m in height. The RGBCCTF30 can be controlled by the RGBCCT092 - Touchzone RGB + CCT Remote (Supplied separately) or by your Smart phone when you purchase the RGBIBOX2 - WiFi iBox Controller. The Touchzone remote and RGBIBOX2 allows you a full range of colour changing and operation of pre-programmed colour displays. You can also select from a range of white colour temperatures to give you your preferred white and allows dimming of both white and colour functions.



Technical	240v 30w 2700-6500k 160° beam angle 2800Lm IP65
Colour/ Finish	black powder coated aluminium
Exterior Dimensions	167mm x 226.5mm (including bracket) and 40mm deep

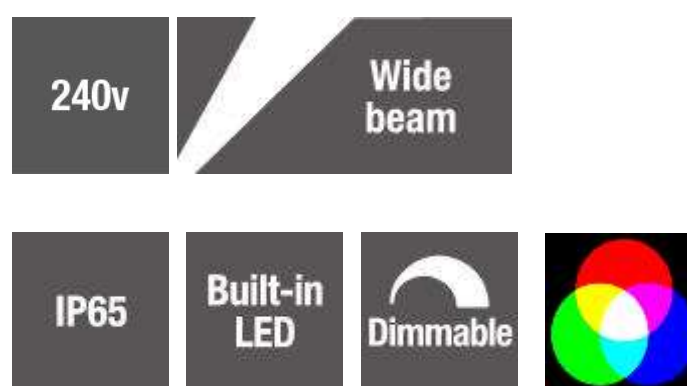


Installation guidelines

Stirrup bracket mounts on walls or the optional E2530M ground spike. Alternatively, the E4013BN can be used for mounting on a tree. A 400mm input cable is provided for connection to the mains supply via a separate weatherproof junction box, junction box or underground joint kit (not supplied).

Using a single RCD for large numbers of 240v fittings is not recommended due to the risk of nuisance tripping. We advise the use of separate RCD protection for each circuit and a maximum of 12 fittings per RCD

To connect the RGBCCT092 controller power off then power on. Within 3 seconds touch the 'zone-On' buttons quickly 3 times. Once the LED flashes green set up is complete.

To un-link repeat this process but press 'Zone-On' 5 times. The lights will now flash red.

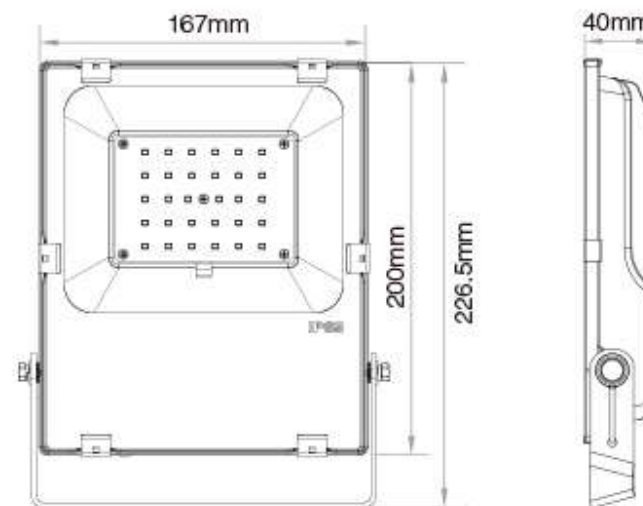

2 YEAR WARRANTY

Powder coated aluminium body & fitting

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials.
Corrosion due to exposure to salt or chlorine.
Damage due to incorrect installation practices.
Responsibility for 3rd party work and/or consequential loss.