



# Pointer 12v recessed steplights

**Pointer** 12v recessed steplights are designed to screw-fix in stone or brick walls and timber surfaces for use with 12v 10-35w MR16 halogen or low energy l.e.d. lamps. "Eyelid" models conceal the light source from overhead view. The front bezel removes for screwing the cast brass body into a timber or wall and for easy lamp changing without removing the light from the wall. **Pointer** steplights are fitted with a clear lens as standard: **E2500F** flush frosted lens, which is recommended for use with plain rim models, and clip-on glare louvres & spread lens are optional. **Pointer** steplights are rated IP66 - suitable for splash locations such as the side of water staircases. They are fitted with a 6m rubber cable for easy connection to a transformer without cable joints in many cases. The fine sandblasted finish of brass models will weather to an ochre colour to blend with sandstone, timber and buff brick. Copper rims will weather from their original bright finish to a mottled brown finish within weeks to blend well with red brick walls, while 316 stainless steel rims are designed to resist corrosion in most situations.

**12v 35w LED IP66**

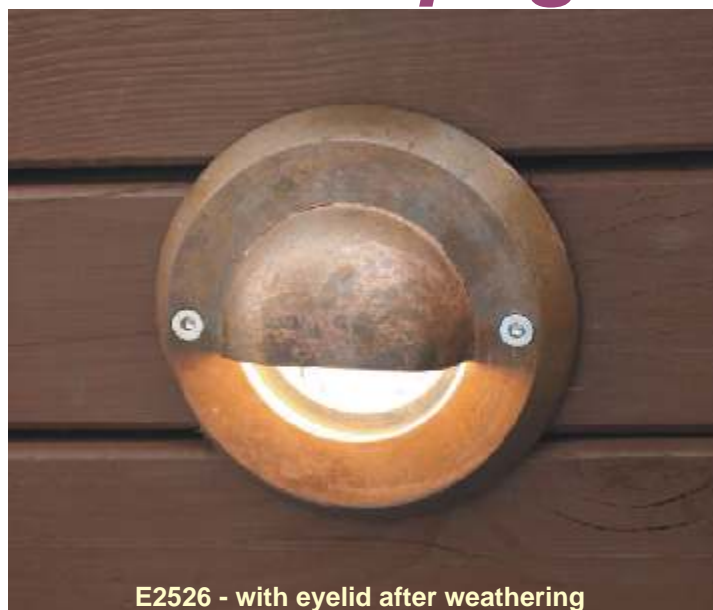

E2526 - with eyelid after weathering

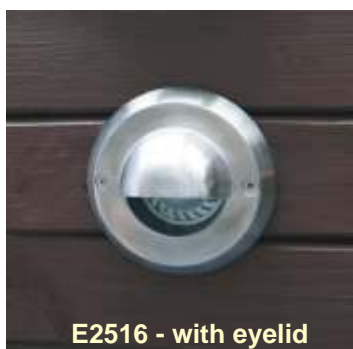

E2516 - with eyelid



E2515 - with plain rim



E2525 - with plain rim



E2565 - with plain rim



E2566 - with eyelid after weathering

<b>E2515</b>	Pointer steplight - Stainless steel rim
<b>E2516</b>	Pointer eyelid steplight - Stainless steel eyelid
<b>E2525</b>	Pointer steplight - Copper Rim
<b>E2526</b>	Pointer eyelid steplight - Copper Eyelid
<b>E2565</b>	Pointer steplight - Brass
<b>E2566</b>	Pointer eyelid steplight - Brass

## Pointer Lamp Energy Ratings



12v L.E.D. LAMPS



HALOGEN Powersavers



12v HALOGEN LAMPS

Halogen / l.e.d. lamp comparison			
Powersaver	Standard	l.e.d. module equivalent	
-	20w 36°	MR16LED3WW	3w warm white
20w 36°	35w 36°	MR16LED6WW	6w warm white
35w 36°	-	MR16LED6W	6w white

