

E4172T - Elipta Strap-mount Tree Spotlight



Installation notes

Ensure mains supply is isolated prior to installation of this product.

Unscrew the bezel and insert lamp. Apply small amount of grease to thread and screw back on to the body of the light. Screw the spike into the Spotlight and place the luminaire in desired location.

Cable connections can be made using a T9966 IP68 in-line connector or any IP rated junction box


Recommended 12 fittings per circuit.

Refer to the instruction manual for further guidance.

Note – This product must be installed by a qualified electrician.

Part code	E4172T
Diffuser	Clear
Dimensions (mm)	Body – 111x63
Cable length (mm)	2000
Construction	Aluminium
Finish	Rustic Brown Powder coat
Class	Class I
IP rating	IP65
Maximum wattage	LED - 10W
Lamp base	GU10
Lamp included	No
Dimmable	Dependant on lamp
Input voltage	240V 50Hz
Net weight (g)	644
Gross weight (g)	698
Warranty	2 Years
Manufactured in accordance with	BS EN 60598
Origin of manufacture	PRC

240v GU10	240v Pre-wired 2m	IP65
Beam 15°-120°		Retrofit LED

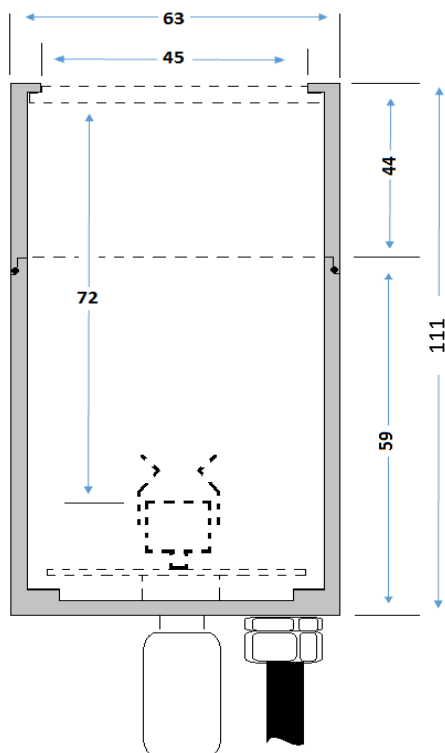

2 YEAR WARRANTY

Powder Coated Aluminium Body & Fitting

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Damage due to incorrect installation practices. Responsibility for 3rd party cost; indirect or consequential loss.

2 YEAR WARRANTY

Internal wiring & lampholder

Exclusions: Damage due to incorrect lamp fitting or lamps above specification. Responsibility for 3rd party cost; indirect or consequential loss