

## E94035SM - Elipta Apollo 35 Spotlight



### Installation notes

Ensure mains supply is isolated prior to installation of this product.

Unscrew the front plate and insert lamp. Apply small amount of grease to the screws and secure front plate to the body of the fitting.


Recommended 12 fittings per circuit.


Refer to the instruction manual for further guidance.

**Note** – This product must be installed by a qualified electrician.

Spike and accessories sold separately.

Part code	E94035SM
Diffuser	Clear
Dimensions (mm)	213x122x166
Cable length (mm)	2000
Construction	Grey Powder Coated Aluminium/Borosilicate Glass
Finish	Grey Powder Coat
Class	Class I
IP rating	IP65
Beam angle	36°
Maximum wattage	Metal Halide – 35W Max
Lamp base	G8.5 single ended
Lamp included	No
Dimmable	No
Input voltage	240V 50Hz
Net weight (g)	2227
Gross weight (g)	2457
Warranty	2 Years
Manufactured in accordance with	BS EN 60598
Origin of manufacture	PRC



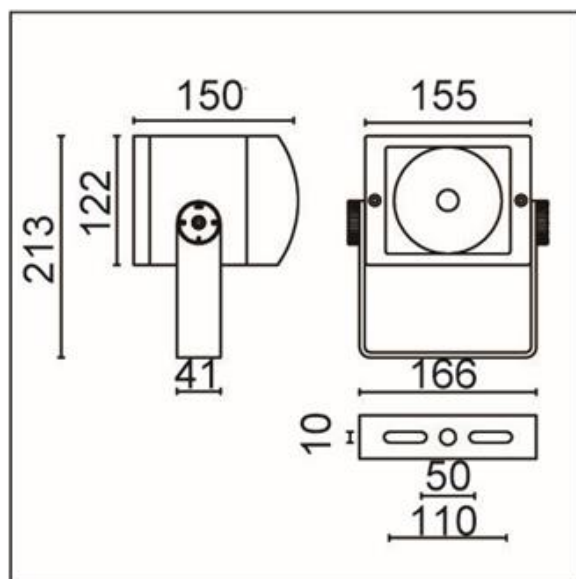

## 2 YEAR WARRANTY

### Powder Coated Aluminium Body & Fitting

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Damage due to incorrect installation practices. Responsibility for 3rd party cost; indirect or consequential loss.

## 2 YEAR WARRANTY

### Internal wiring & lampholder

Exclusions: Damage due to incorrect lamp fitting or lamps above specification. Responsibility for 3rd party cost; indirect or consequential loss