

E8711N - Elipta Modula Recessed Up Light



Installation notes

Ensure mains supply is isolated prior to installation of this product.

Unscrew the bezel and insert lamp. Apply small amount of grease to the screws and secure bezel to the body of the fitting.

Provide 300mm depth of shingle drainage below the up light.


Do not use in waterlogged ground.

Refer to the instruction manual for further guidance.

Note – This product must be installed by a qualified electrician.

Part code	E8711N
Diffuser	Clear
Dimensions (mm)	Body - 175x120
Cut-out dimensions (mm)	With Sleeve – 112 Without Sleeve - 107
Cable length (mm)	2000
Construction	Bezel – 316 Stainless Steel Body –Aluminium
Finish	Stainless Steel
Class	Class III
IP rating	IP67
Maximum wattage	LED - 10W
Lamp base	MR16
Lamp included	No
Dimmable	Dependant on lamp
Input voltage	12V DC
Net weight (g)	1967
Gross weight (g)	2075
Warranty	2 Years
Manufactured in accordance with	BS EN 60598
Origin of manufacture	PRC



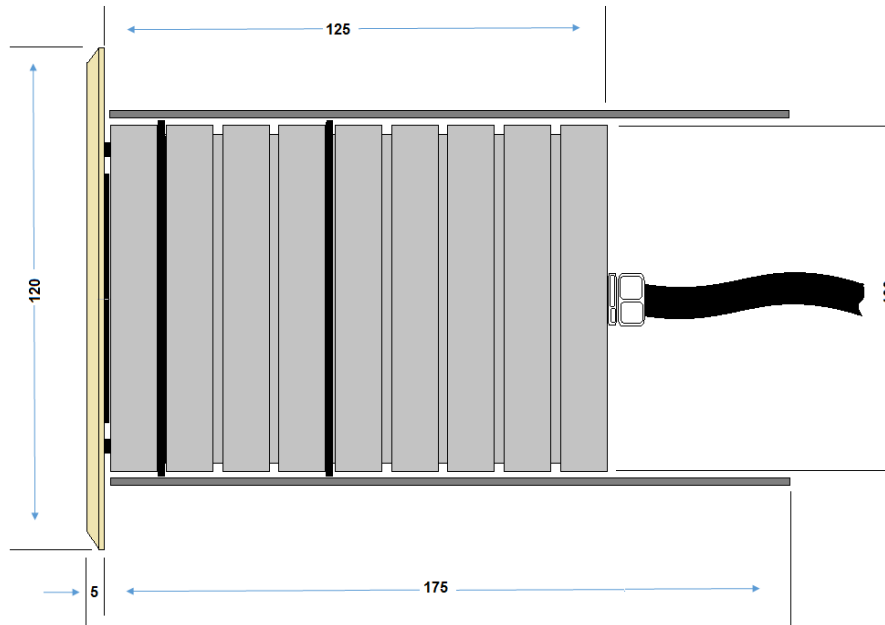

5 YEAR WARRANTY

Solid 316 stainless steel top

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Natural brass will discolour (tarnish) over time. Damage due to incorrect installation practices.

2 YEAR WARRANTY

Anodised aluminium body

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Damage due to incorrect installation practices. Responsibility for 3rd party cost; indirect or consequential loss.